
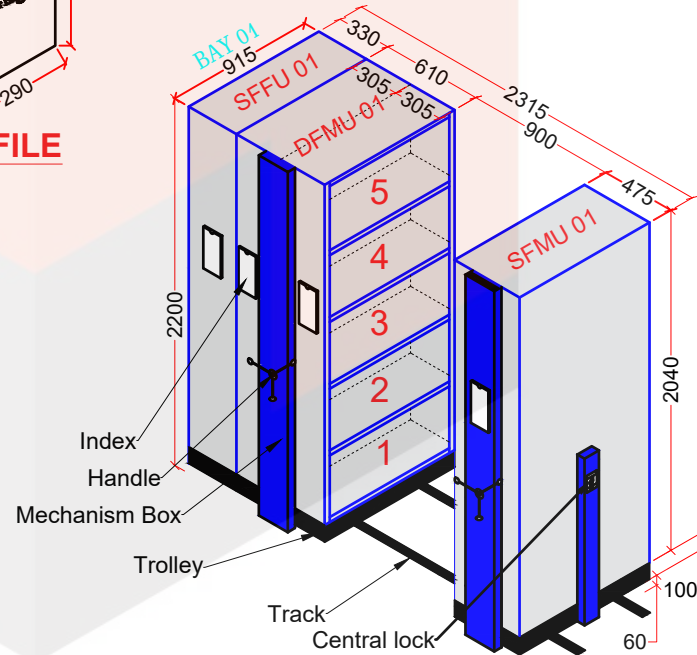
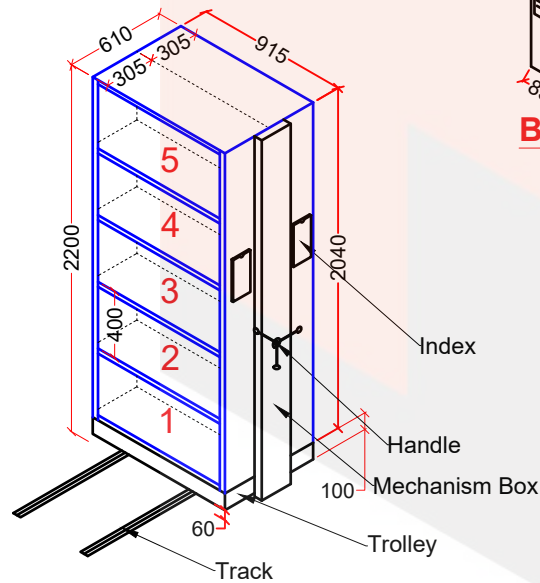
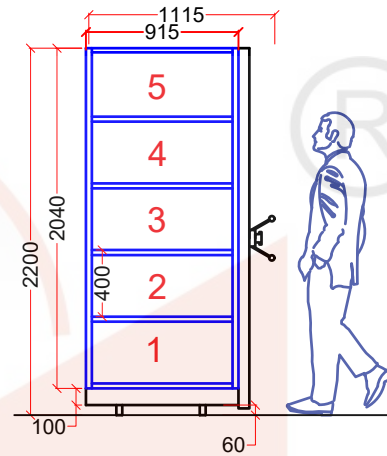


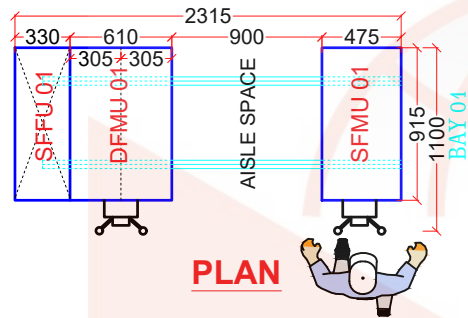

ALL DIMENSION ARE IN MM			
SR.NO	DESCRIPTION	SIZE (HT X W X D)±3%	QTY
1	DOUBLE FACE MOVABLE UNIT(DFMU)	2200 X 915 X 610	1
2	SINGLE FACE MOVABLE UNIT(SFMU)	2200 X 915 X 475	1
3	SINGLE FACE FIX UNIT(SFFU)	2200 X 915 X 330	1
200 APPROX BOX FILE 85 mm STORE IN SYSTEM		TOTAL	3 NOS
4 BODY (ALMIRAH)		TOTAL 20 SHELVES	

TECHNICAL SPECIFICATION

STRUCTURE :-

DRIVE COVER MINIMUM 0.8 MM THK C.R.C.A.
 VERTICAL PANELS MINIMUM 0.8 MM THK C.R.C.A.
 CENTER PARTITION MINIMUM 0.8 MM THK C.R.C.A.
 TOP PANELS 0.8 MINIMUM MM THK C.R.C.A.
 SHELVES 0.8 MM MINIMUM THK C.R.C.A.
 CHANNEL : MINIMUM 0.8 MM THK C.R.C.A.
 BASE FRAME / TROLLEY MINIMUM 2.5 MM THK HR
 TRACK / GUIDE RAIL : MINIMUM 28 MM ROUND BAR
 WHEEL : CAST IRON
 HANDLE : 3 ARM WITH LOCKING MECHANISM

FINAL FINISH :-

IN-HOUSE 7 TANK POWDER COATED
 PHOSPHATING-ANTIRUST TREATMENT PROCESS

LOAD LEVELS :-

5 COMPARTMENT / 4 SHELVES

LOAD PER LEVELS :-

60 KG APPROX UDL PER SHELVES
 ALL DIMENSION CONTAIN TOLERANCE ± 3 %

SYSTEM LOAD CAPACITY WITH & WITHOUT FILES :-

1000KG CAPACITY WITH FILES.
 200KG CAPACITY WITHOUT WITHOUT FILES.



MYRIAD[®]
STORAGE
 SYSTEM LLP